



**Faster**  
**More Precise**  
**More Intelligent**

## **LIXUS-i 8192**

**Intelligent Line Scan Camera**  
**Specification**

### **SPECIAL FEATURES**

- **Autonomous measuring and monitoring system**
- **Integrated signal processing for evaluating each scan in real-time**
- **Extremely high resolution (8.192 picture elements)**
- **High line scan rate ( $\leq 3.620$  scans/s)**
- **Electrically separated digital inputs and outputs**
- **Analogue current interface**
- **Sturdy, industrial strength design**
- **Asynchronously triggerable**

### **APPLICATIONS**

- **Measurement and monitoring of geometric dimensions (position, width, diameter)**
- **Monitoring of surface faults, holes and tears in web materials (sheet metal, paper, foil, textiles, wood)**
- **Radial and axial measurement**
- **Monitoring the presence of components (adhesives, coatings, etc.)**
- **Particle count**

### **DESCRIPTION**

The intelligent line scan camera **LIXUS-i 8192** is a high resolution, autonomously functioning measurement and monitoring system. The integrated, highly powerful signal processing system exactly evaluates each scan. It delivers measurement results, and it can filter these results as well as monitor defined deviations. It can intervene directly in the process via several outputs.

The electronically integrated shutter enables achievement of very short exposure times. Fast and short events create an external impulse that asynchronously triggers the camera. Several systems can be linked and synchronized.

High flexibility is achieved through a configurable signal processing core. The range of functions is regularly extended. User-friendly software for Windows NT/95 is used to select the functional modules and their parameters. When the modules have been set up and the settings have been stored, the camera works autonomously.

The anti-blooming function prevents the camera **LIXUS-i 8192** from being sensitive to saturation of individual pixels. The camera has manual and automatic controllers for exposure time, gain and video offset (contrast adjustment). Thus it is capable of correcting object illumination, and it guarantees optimum adjustment of the sensor to signal processing.

### **COMPATIBILITY**

Compatible with all cameras in the **LIXUS-i** series.

## PHYSICAL/TECHNICAL CHARACTERISTICS


Sensor	CCD, 8.192 pixels, 7 $\mu\text{m}$ x 7 $\mu\text{m}$
Sensing area	57,3 mm x 7 $\mu\text{m}$
Exposure time	3,0 $\mu\text{s}$ ...70 ms (adjustable internally or via synchronous input)
Line scan rate	max. 3.620 scans/s
Control (manually/automatically)	Exposure time, gain, offset (contrast) for a selected section
Interface	RS232, RS422 or RS485 (max. 115kBaud), opto-isolated Separate RS232 connection for configuration on site (optional)
Inputs	5 x digital (optional 8), opto-isolated
Outputs	3 x digital (optional 7), opto-isolated 1 x analog 4...20 mA, 0...20 mA, opto-isolated (optional)
Synchronization	Internal, external, asynchronously triggerable 1 x input, opto-isolated 1 x output, opto-isolated
Lens mounting	M72 x 1 Mamiya-bayonet (optional) F-Mount (M42x1) (optional)
Fastening	2 T-grooves with 2 M4 sliding blocks each, 4 reference holes $\varnothing 3\text{F}7$ for fitting pins $\varnothing 3\text{m}6$ , 6 x M4 screw tap holes on the front
Degree of protection	IP65 (with lens protector)
Power supply	20V...30V DC
Power consumption	app. 15W
Operating temperature	0°C...+40°C

## FUNCTIONS

- Edge detection for position and width measurement with threshold values that can be uniformly defined or set for each picture element and with different filtering methods (elimination of background noise and severely structured background, measurement from the edge or from a definable center, pre-selection of edges, localization of measurement window, ...)
- Monitoring of deviation from position and width of several webs or objects
- Monitoring of the number of objects
- Monitoring of the tolerance limits of a light intensity progression
- Detection of surface faults (dirt, scratches, tears, holes...)

Please refer to our current list of functions for further details!

## DIMENSIONS

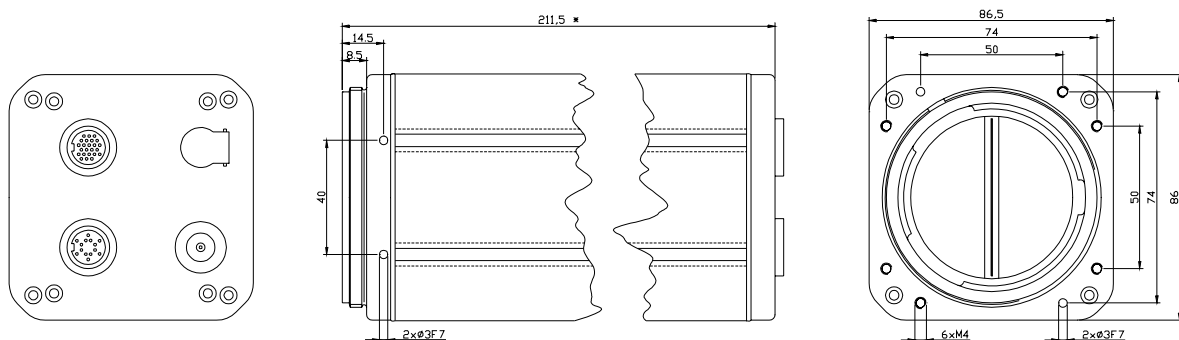

\* Please check total length using different lens attachments!

## OPTIONS/ACCESSORIES

- Lens protector
- Ready-made connection cable
- Lamps **LIXUS-LIGHT**
- Lenses, lens mount adapter